




FLANGED DIAPHRAGM SEALS

BRF FLANGED DIAPHRAGM SEAL

The diaphragm seal covers the entirety of the raised face of the flange

Standard Features



Process Connection Flanged	ASME	4" / 3"	3"	2"	2"
	DIN	DN100/DN80	DN80	DN50	DN50
Diaphragm Size		89mm	72mm	57mm	44mm
Max. process pressure in bar at 20 °C		414	414	414	414
Min. span for GP & AP in mbar		80	200	600	1250
Min. span for DP in mbar		10	20	100	300
Min. pressure range for PI in bar		0.5	0.5	0.6	1.6
Max. capillary length in meter		15	15	15	10

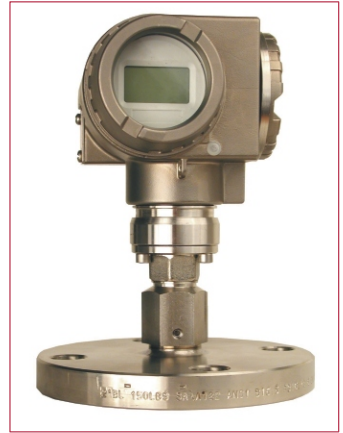


Flange Standard	Standard	Options
ASME B16.5	size:	2"; 3"; 4"
	rating	150; 300; 600 #
	facing:	raised face (RF)
	finish:	factory standard
DIN 2501	DN:	50; 80; 100
	PN:	10; 25; 40 bar
	form:	D, acc. DIN 2526
	finish:	factory standard
JIS	on request	

Other flange sizes available on request

Wetted Parts	Standard	Options
Flange	AISI-316 (L)	Hastelloy B2, Hastelloy C276, Inconel 600 / 686, Monel 400, Nickel 200, Titanium
Diaphragm (full covering of raised face)	AISI-316 L	Hastelloy B2, Hastelloy C276, Inconel 600 / 686, Monel 400, Nickel 200, Tantalum, Titanium
Coatings:		ETFE, FEP, PFA, PTFE, PVDF, gold, silver

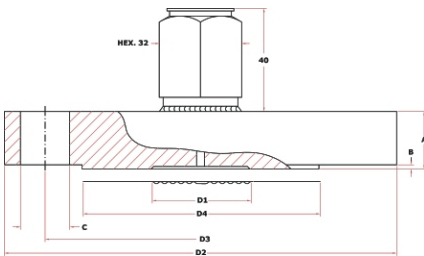

Threaded process connection

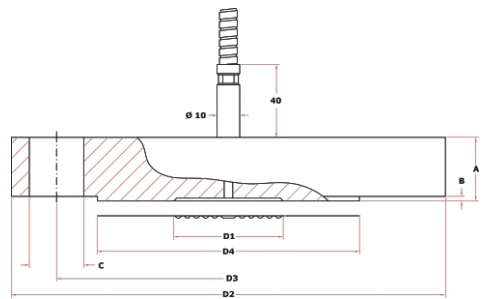

Capillary version for remote monitoring

See appendix for all flange dimensions and pressure ratings.

Seals ~
Flanged



FLANGED DIAPHRAGM SEALS

DP = differential pressure
GP = gauge pressure
AP = absolute pressure

Process Connection		Minimum Span (mbar)			Pressure Gauge Minimum Range (bar)		
		Transmitter Type			Gauge Diameter (mm)		
Flange Size	Diaphragm Diameter (mm)	GP	AP	DP	ø 63	ø 100	ø 160
2" / DN50	44	1250	1250	300	1.6	1.6	1.6
2" / DN50	57	600	600	100	0.6	0.6	0.6
3" / DN80	72	200	200	20	0.5	0.5	0.5
3" / DN80	89	80	80	10	0.5	0.5	0.5
4" / DN100	89	80	80	10	0.5	0.5	0.5

Effects of temperature on pressure readings per ±10 °C (in mbar)
 ~ measured from 20°C

Process Connection		Transmitter Type				Transmitter Type			
Flange Size	Diaphragm Diameter (mm)		DP	Seal	Capillary per metre	GP	AP	Seal	Capillary per metre
2" / DN50	44	0.2	1.24	2.28	1.9	1.9	4.9	10.35	
2" / DN50	57	0.15	0.66	0.63	1.7	1.7	2.65	3.9	
3" / DN80	72	0.1	0.24	0.2	0.55	0.55	0.95	1.2	
3" / DN80	89	0.04	0.09	0.08	0.19	0.19	0.39	0.4	
4" / DN100	89	0.04	0.09	0.08	0.19	0.19	0.39	0.4	



ORDERING MATRIX

Locate the order code for your specification and enter it into the appropriate box. See the Diaphragm Seals introduction and the tables on the previous page for more information about each component.

PROCESS CONNECTION

FLANGE

- A:** ASME 2"
- B:** ASME 3
- C:** ASME 4"
- D:** DIN 50
- E:** DIN 80
- F:** DIN 100

MATERIAL

- 1:** 316L St. Steel
- 2:** Hastelloy B2
- 3:** Hastelloy C276
- 4:** Inconel 600
- 5:** Inconel 686
- 6:** Monel 400
- 7:** Nickel 200
- 8:** Titanium

PRESSURE RATING

- 1:** 150#
- 2:** 300#
- 3:** 600#
- 4:** 10 bar
- 5:** 25 bar
- 6:** 40 bar

DIAPHRAGM CONSTRUCTION

MATERIAL

- 1:** 316L St. Steel
- 2:** Hastelloy B2
- 3:** Hastelloy C276
- 4:** Inconel 600
- 5:** Inconel 686
- 6:** Monel 400
- 7:** Nickel 200
- 8:** Titanium
- 9:** Tantalum

LININGS/COATINGS

- 0:** None
- 1:** ETFE
- 2:** FEP
- 3:** PFA
- 4:** PTFE
- 5:** PVDF
- 6:** Gold
- 7:** Silver

DIAMETER

- A:** 44mm
- B:** 57mm
- C:** 72mm
- D:** 89mm

TRANSMISSION FILL

- 1:** Standard
- 2:** TO - 23
- 3:** TO - 31
- 4:** TO - 41
- 5:** TO - 47

CAPILLARY

- A:** No
- B:** Side Entry
- C:** Top Entry

CAPILLARY LENGTH

- A:** 1m **D:** 3m **G:** 8m
- B:** 1.5m **E:** 4m **H:** 10m
- C:** 2m **F:** 6m **I:** 15m

CERTIFICATES

- 1:** calibration test certificate
- 2:** conformity certificate
- 3:** material certificate
- 4:** NACE certificate

QUANTITY

MODEL

BRF



Can be fitted to

PG TR PS

Select the instrument you want to have connected to this flanged seal and write in the complete order number in the empty matrix above. Together with the seal order number this completes the specifications for your instrument.